

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**

This Page Blank (uspto)

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 09-220394

(43)Date of publication of application : 26.08.1997

(51)Int.Cl.

D06F 35/00

(21)Application number : 08-067027

(71)Applicant : FUKAZAWA KIYOSHI

(22)Date of filing : 15.02.1996


(72)Inventor : FUKAZAWA KIYOSHI

(54) WASHING BAG

(57)Abstract:

PROBLEM TO BE SOLVED: To provide a double-pocket washing bag which enables separate washing of high grade slip and a brassiere with a metallic clasp at the same time without damaging the high grade slip or the like.

SOLUTION: A net bag is bent at a bending line 3d from the entrance side of the net bag in such a manner that sides 1a, 1a which are a part of the side of the net bag and sides 2b, 2b which are a part of the side of the net bag overlap each other, and the sides 1a, 1a and the sides 2b, 2b are sewn up to manufacture a semi-main body 6. Subsequently, the face of the semi-main body 6 having no entrance is directed upward, the bending line 3d of the semi-main body 6 and the side (h) of a small net cloth 4 are sewn up, the sewn-up large net cloth 5 is placed in such a manner that sides (3c), (3c), sides (4d), (4d), a side (h) and a line (j), sides 6m and 6m, sides 7n and 7n and sides (k) and (k), respectively overlap each other, and bent on this side at the line (j) and the side (h), and the sides 3c and 3c, the sides 6m and 6m, the sides 4d and 4d, the sides 7n and 7n and the sides k and k are sewn up.

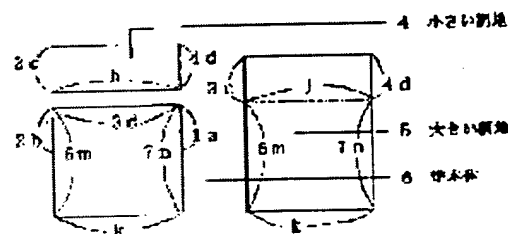

LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]

Copyright (C): 1998.2003 Japan Patent Office

* NOTICES *

Japan Patent Office is not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. **** shows the word which can not be translated.
3. In the drawings, any words are not translated.

CLAIMS

[Claim(s)]

[Claim 1] It sets to the string bag 1 composed with the fiber thread which formed the gate 2, and is [Drawing 2]. It bends in the place of 3d of bend lines so that it may be alike and the part, side 2b, and 2b of a part of side side of a string bag, the sides 1a and 1a, and the side side of a string bag may be put together from the existing gate 2 side of a string bag 1, and the sides 1a and 1a and side 2b, and 2bs are sutured, and it is [Drawing 3]. It is alike, as it is, the semi- opening main part 6 is produced, and it is [Drawing 4]. ** -- the gate of the semi- main part 6 twisting, the field of the direction being turned upwards like, and side h of 3d of bend lines of the semi- main part 6 and small **** 4 being sutured, and to what was sewn up Large **** 5 Side 3c, side 3c, 4d of sides, 4d of sides, the side h, and line j It carries so that 6m of sides, 6m of sides, 7n of sides, 7n of sides, the side k, and side k may be put together, and it bends to the front in the place of Line j and the side h, and side 3c, side 3c, 6m of sides, 6m of sides, 4d of sides, 4d of sides, 7n of sides, 7n of sides, the side k, and side k be sutured This invention is a wash bag which consists of the above configurations.

[Translation done.]

* NOTICES *

Japan Patent Office is not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. **** shows the word which can not be translated.
3. In the drawings, any words are not translated.

DETAILED DESCRIPTION

[Detailed Description of the Invention]

[0001]

[Industrial Application] Since this invention can be ***** (ed) to wash the slip which was made without the fastener and used the stocking and the high-class race since the slip which hooked on the fastener and used the stocking and the high-class race was not damaged when going the washing in and out into a wash bag, and the brassiere equipped with a metaled clasp together, it relates to the wash bag made into the double pocket type.

[0002]

[Description of the Prior Art] Although it hooked on the fastener, I damaged and did the slip which used the stocking and the high-class race and there was a double pocket type conventionally when going the washing in and out since the fastener was used, it was not able to ***** to wash a stocking, and the slip which used the high-class race and the brassiere equipped with a metaled clasp together.

[0003]

[Problem(s) to be Solved by the Invention] This had a defect like the next.

(b) Since the fastener was used, when going the washing in and out, it hooked on the fastener and the slip which used the stocking and the high-class race had been damaged.

(b) although there was a double pocket type, it was not made by the ability hearing that he wants to wash a stocking, and the slip which used the high-class race and the brassiere equipped with a metaled clasp together.

This invention is made in order to remove these defects.

[0004]

[Means for Solving the Problem] It sets to the string bag 1 composed with the fiber thread which formed the gate 2, and is [Drawing 2]. It bends in the place of 3d of bend lines so that it may be alike and the part, side 2b, and 2b of a part of side side of a string bag. the sides 1a and 1a. and the side side of a string bag may be put together from the existing gate 2 side of a string bag 1. And the sides 1a and 1a and side 2b, and 2bs are sutured, and it is [Drawing 3]. It is alike, and as it is, the semi- opening main part 6 is produced. Furthermore, [Drawing 4] ** -- like, the gate of the semi- main part 6 twists, the field of the direction is turned upwards, and side h of 3d of bend lines of the semi- main part 6 and small **** 4 is sutured. And large **** 5 is put on what was sewn up so that side 3c, side 3c, 4d of sides, 4d of sides, the side h, line j, 6m of sides, 6m of sides, 7n of sides, 7n of sides, the side k, and side k may be put together. And it bends to the front in the place of Line j and the side h. Furthermore, side 3c, side 3c, 6m of sides, 6m of sides, 4d of sides, 4d of sides, 7n of sides, 7n of sides, the side k, and side k are sutured. This invention is a wash bag which consists of the above configurations.

[0005]

[Function] When washing the washing with a washer, in order to prevent a pain and slag, the washing is put into a wash bag and washed, but if the washing is put in and washed from a gate 2 and wash finishes, the washing will be taken out from a gate 2.

[0006]

[Example] Hereafter, the example of this invention is explained.

(b) Set to the string bag 1 composed with the fiber thread which formed the gate 2, and it is [Drawing 2]. It bends in the place of 3d of bend lines so that it may be alike and the part, 2b, and 2b of a part of side side of a string bag, the sides 1a and 1a, and the side side of a string bag may be put together from the existing gate 2 side of a string bag 1.

(b) Suture the sides 1a and 1a and side 2b, and 2bs, and it is [Drawing 3]. It is alike, and as it is, the semi- main part 6 is produced.

(c)

[Drawing 4] ** -- like, the gate of the semi- main part 6 twists, the field of the direction is turned upwards, and side h of 3d of bend lines of the semi- main part 6 and small **** 4 is sutured.

(d) Put large **** 5 on what was sewn up so that side 3c, side 3c, 4d of sides, 4d of sides, the side h, side j, 6m of sides, 6m of sides, 7n of sides, 7n of sides, the side k, and side k may be put together.

(e) Bend to the front in the place of Line j and the side h.

(**) Suture side 3c, side 3c, 6m of sides, 6m of sides, 4d of sides, 4d of sides, 7n of sides, 7n of sides, the side k, and side k.

When using this with the above structures and it washes the washing with a washer, the washing is put into a wash bag and this invention washes it, in order to prevent a pain and slag, but if the washing is put in and washed from a gate 2 and wash finishes, it will take out the washing from a gate 2.


[0007]

[Effect of the Invention]

(b) Since a fastener is not used, when going the washing in and out, hook on a fastener and don't damage the slip which used the stocking and the high-class race.


(b) Since it is a double pocket type, it can ***** to wash a stocking, and the slip which used the high-class race and the brassiere equipped with a metaled clasp together.

Drawing selection Representative drawing

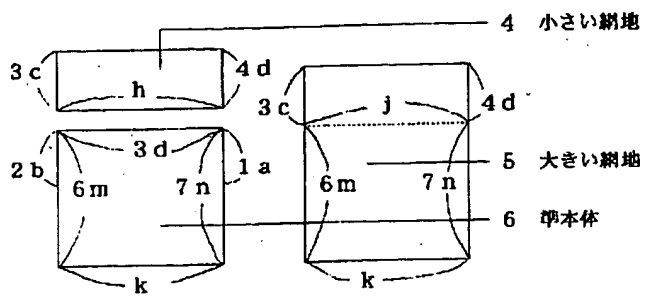


[Translation done.]

Drawing selection drawing 3

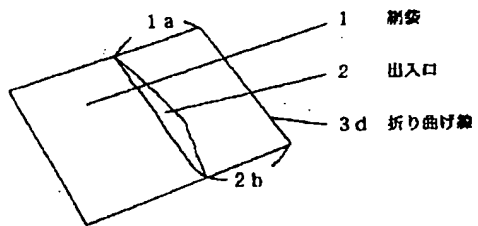

[Translation done.]

Drawing selection drawing 4

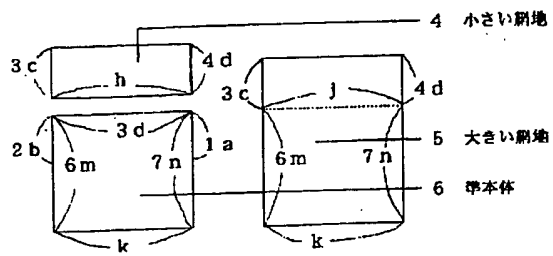

[Translation done.]